


IAPMO-R&T



GasMark
GMK10118

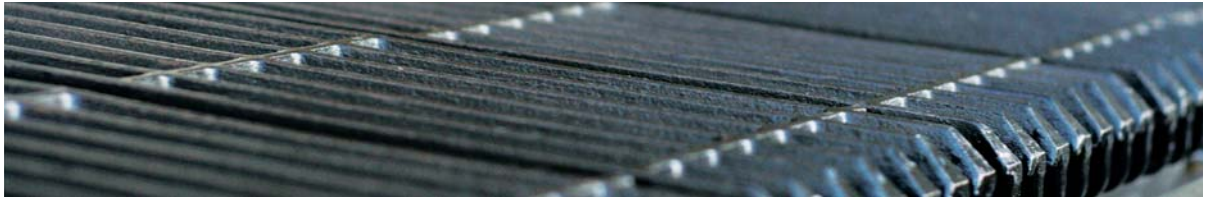


Features:

- GasMark Certified.
- Piezo & pilot ignition.
- Free standing design.
- Insulated side panels.
- Height adjustable feet.
- Precision brass valving.
- Undershelf storage space.
- Rated at 20MJ/hr per burner.
- Flame failure safety device.
- Removable: Spillage tray.

Cast iron trivets.

Burner & burner cover

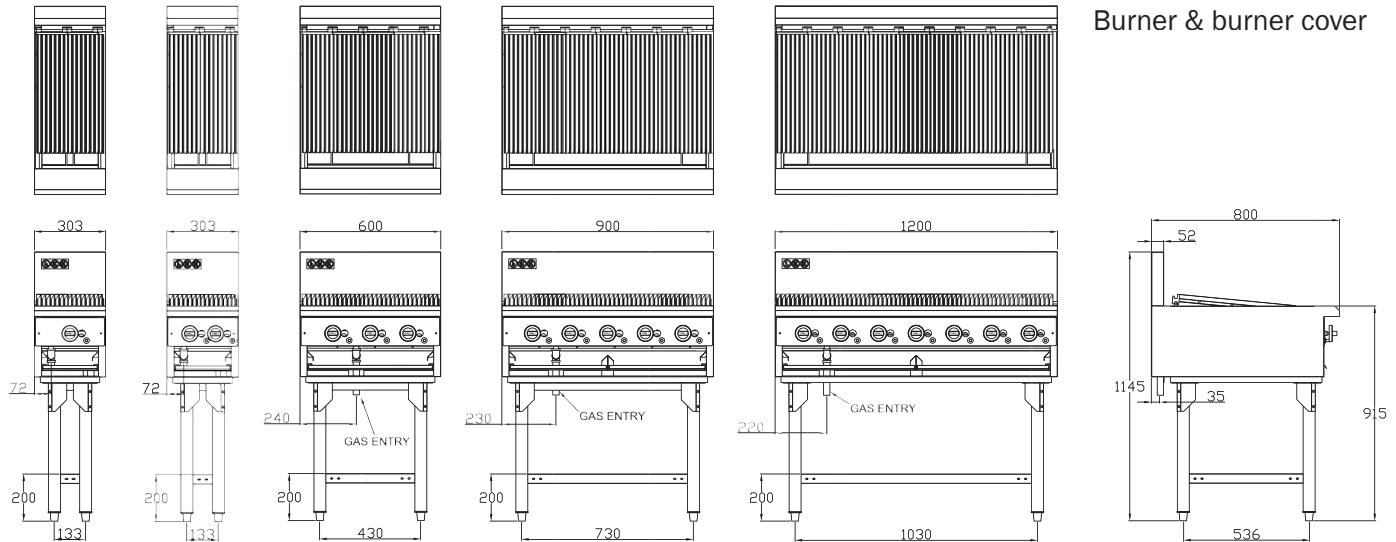

Specification

Model	Natural Gas	LP Gas	Dimensions (W x D x H)
LKKCG3	20MJ/h	20MJ/h	300mm x 800mm x 900mm (working height)
LKKCG3-2	37.4MJ/h	37.4MJ/h	300mm x 800mm x 900mm (working height)
LKKCG6	60MJ/h	60MJ/h	600mm x 800mm x 900mm (working height)
LKKCG9	100MJ/h	100MJ/h	900mm x 800mm x 900mm (working height)
LKKCG12	140MJ/h	140MJ/h	1200mm x 800mm x 900mm (working height)

Height including splashback is 1130mm

Inlet: Gas: 3/4" BSP

• Specifications and design are subject to change without notice • Pictures are for illustrative purposes only • 2015 July



New Zealand Phone: (+64) 09 837 2960 Fax: (+64) 09 836 9168
(Head Office) 18 Paramount Drive, Henderson, Auckland
www.lkk.co.nz sales@lkk.co.nz

Australia Phone: 1300 655 715 Fax: (+61) 02 8587 0033
47 George St, Clyde Sydney, NSW 2142, Sydney
www.lkk.com.au sales@lkk.com.au

Authorised Retailer: