

# Teppanyaki Griddle

IAPMO-R&T




GasMark  
GMK10118



## Features:

- GasMark Certified.
- Piezo & ignition.
- Free standing design.
- Insulated side panels.
- Height adjustable feet.
- Precision brass valving.
- Removable grease tray.
- Flame failure safety device.
- Each burner rated at 20<sup>MJ/hr</sup>
- Griddle plate thickness: 20mm.
- Flame failure standard on all models.

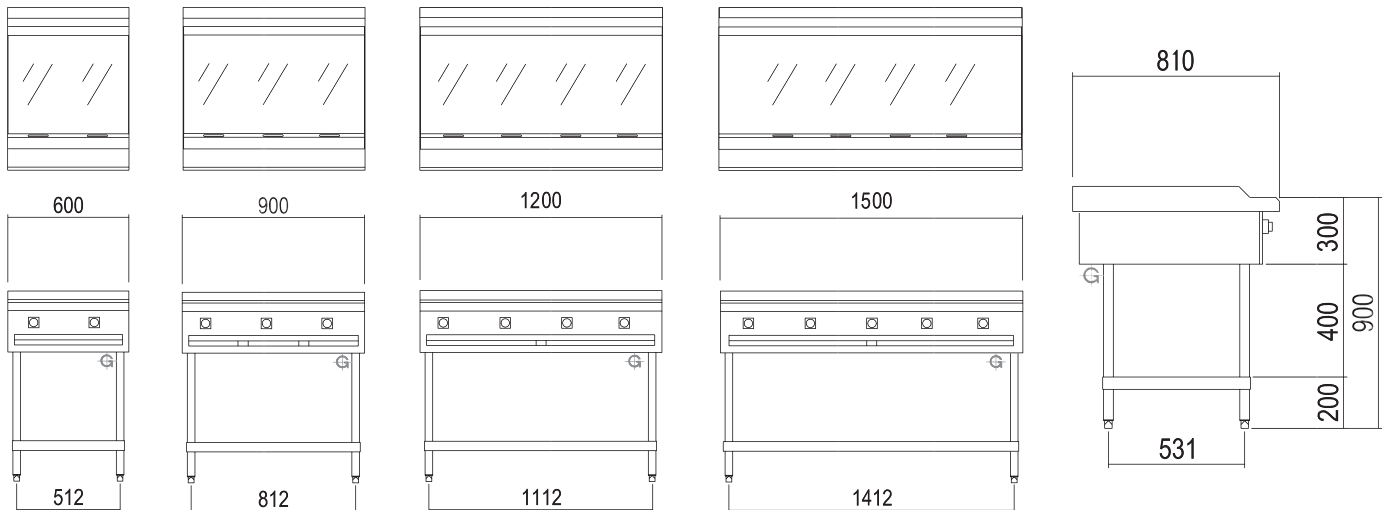

## Specification

Model	Natural Gas	LP Gas	Dimensions (W x D x H)
LKKTG6	40 <sup>MJ/hr</sup>	40 <sup>MJ/hr</sup>	600mm x 800mm x 900mm (working height)
LKKTG9	60 <sup>MJ/hr</sup>	60 <sup>MJ/hr</sup>	900mm x 800mm x 900mm (working height)
LKKTG12	80 <sup>MJ/hr</sup>	80 <sup>MJ/hr</sup>	1200mm x 800mm x 900mm (working height)
LKKTG15	100 <sup>MJ/hr</sup>	100 <sup>MJ/hr</sup>	1500mm x 800mm x 900mm (working height)

Height including splashback is 1130mm

**Inlet:** Gas: 3/4" BSP

• Specifications and design are subject to change without notice • Pictures are for illustrative purposes only • 2015 July



**New Zealand** Phone: (+64) 09 837 2960 Fax: (+64) 09 836 9168  
(Head Office) 18 Paramount Drive, Henderson, Auckland  
www.lkk.co.nz sales@lkk.co.nz

**Australia** Phone: 1300 655 715 Fax: (+61) 02 8587 0033  
47 George St, Clyde Sydney, NSW 2142, Sydney  
www.lkk.com.au sales@lkk.com.au

Authorised Retailer: